

FIG. 1


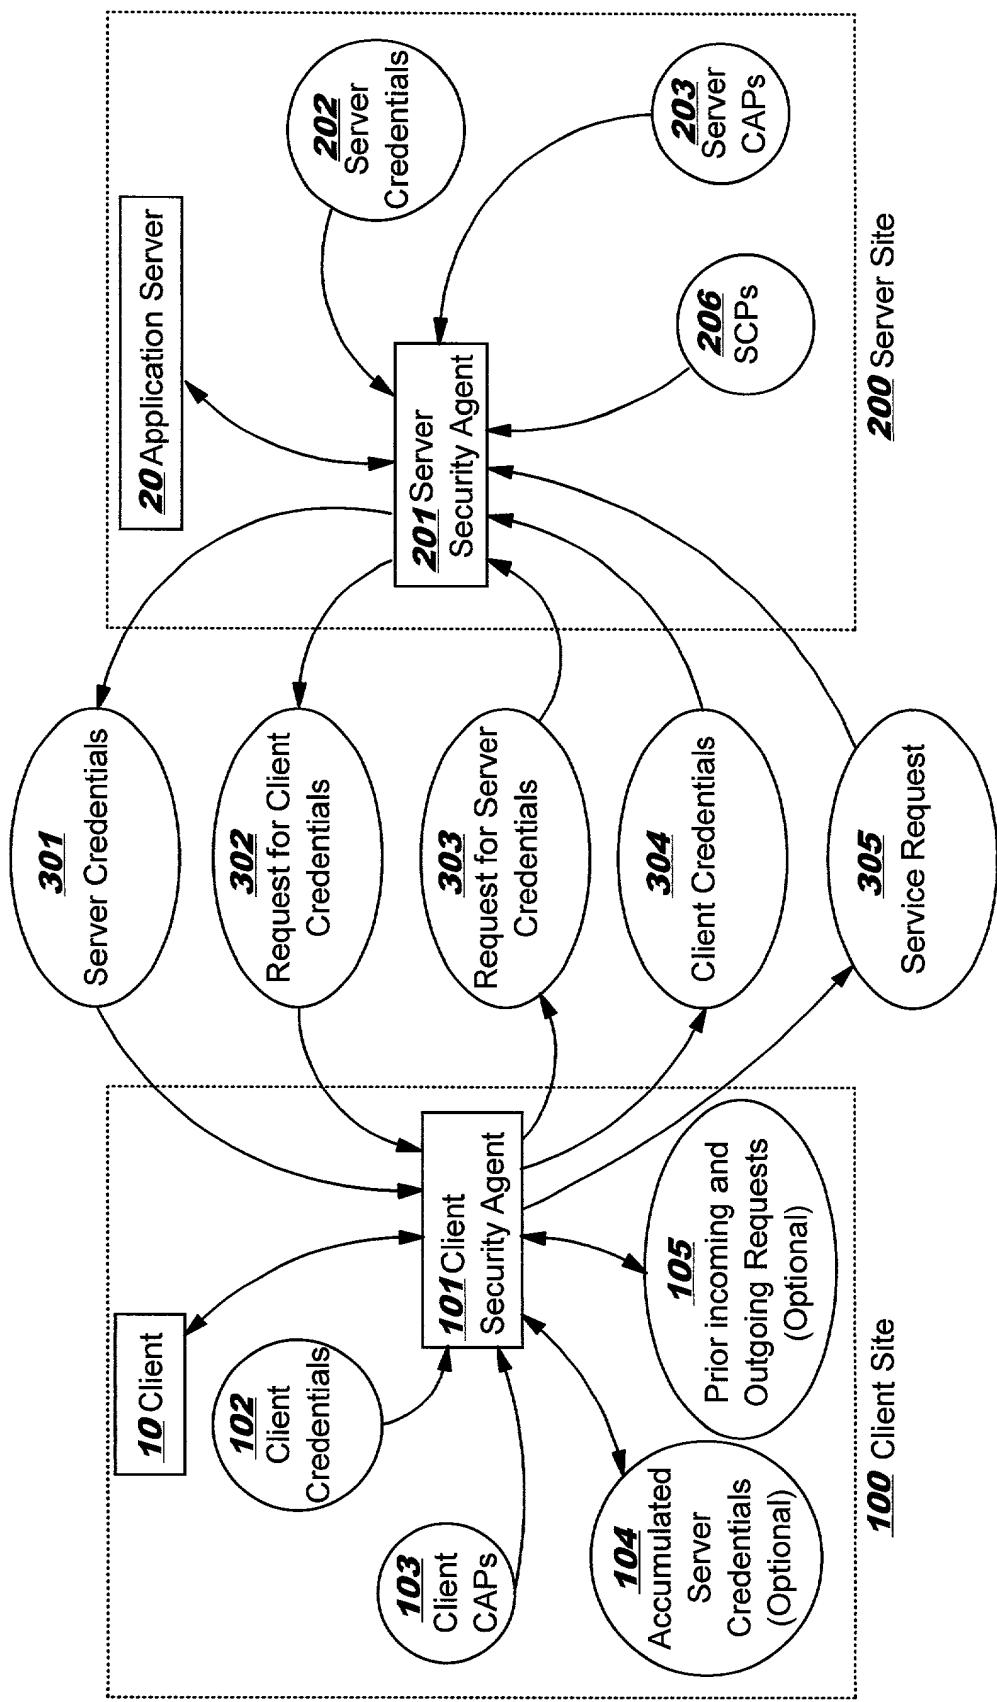


FIG. 2

GB920000044US3
K.E. Seamons, et al.
2/3

Client Credentials	Server Credentials
<pre>type = contract deliveryLocation = Vancouver issuer = Widget Outlet owner = Acme Widget Contract</pre>	<pre>type = reference relationship = shipper issuer = manufacturer 1. owner = A1 Shipping Ref₁</pre>
<pre>type = lease location = Hong Kong issuer = Port of Hong Kong owner = Acme Widget Warehouse</pre>	<pre>type = reference relationship = shipper issuer = manufacturer 2. owner = A1 Shipping Ref₂</pre>
<pre>type = businessOrgMember rating = excellent issuer = Better Widget Bureau owner = Acme Widget B-Org-C</pre>	<pre>type = businessOrgMember rating = good issuer = Intl. Shippers Assoc. owner = A1 Shipping B-Org-S</pre>

FIG. 3

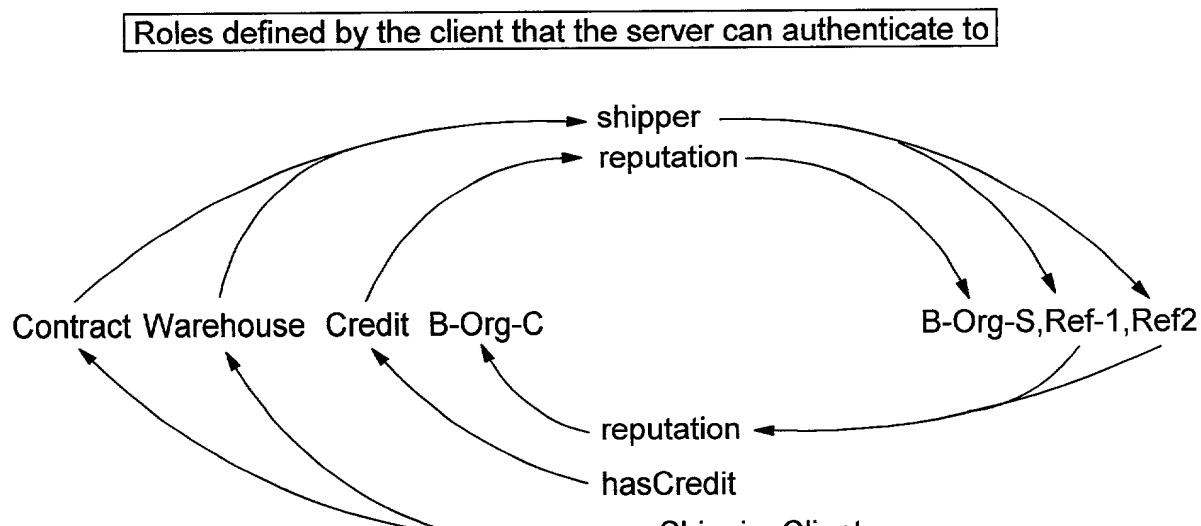

Roles defined by the server the client can authenticate to

FIG. 4

